

imaWorx CXP-12 Quad

Applet Feature Reference Manual for FrameGrabberTest

Functional Description For pylon or GenTL Usage

Document Number: AW001649
Part Number: 000 (English)
Document Version: 04
Release Date: 22 December 2023
Applet Version 3.4.5.0

Contacting Basler Support Worldwide

Europe, Middle East, Africa

Tel. +49 4102 463 515

support.europe@baslerweb.com

The Americas

Tel. +1 610 280 0171

support.usa@baslerweb.com

Asia-Pacific

Tel. +65 6367 1355

support.asia@baslerweb.com

Singapore

Tel. +65 6367 1355

support.asia@baslerweb.com

Taiwan

Tel. +886 3 558 3955

support.asia@baslerweb.com

China

Tel. +86 10 6295 2828

support.asia@baslerweb.com

Korea

Tel. +82 31 714 3114

support.asia@baslerweb.com

Japan

Tel. +81 3 6672 2333

support.asia@baslerweb.com

<https://www.baslerweb.com/en/sales-support/support-contact>

Supplemental Information

Acquisition Card Documentation:

<https://docs.baslerweb.com/acquisition-cards>

Frame Grabber Documentation:

<https://docs.baslerweb.com/frame-grabbers>

Framegrabber SDK Documentation:

<https://docs.baslerweb.com/frame-grabbers/framegrabber-sdk-overview.html>

All material in this publication is subject to change without notice and is copyright Basler AG.

Table of Contents

1. Introduction	1
2. Test Procedure in microDisplay	2
2.1. Load the Applet	2
2.2. Choose Your Test Procedure	4
2.2.1. DMA Performance Test	5
2.2.2. RAM Test	5
2.2.3. Camera Test/Camera Trigger Test	6
2.2.4. GPIO	6
2.2.5. Event Test	6
2.2.6. Monitoring	6
3. Test Mode	7
3.1. OutputSelect	7
4. Image Dimension	9
4.1. Width	9
4.2. Height	9
5. DMA Performance	11
5.1. DmaPerformanceOutputMode	11
5.2. DmaPerformanceFramerate	11
6. Camera	13
6.1. CameraPort	13
6.2. TriggercameraOutSelect	13
7. Buffer	14
7.1. Filllevel	14
7.2. Overflow	14
8. Output Format	15
8.1. Format	15
8.2. Fps	15
9. RAM Test	16
9.1. NumberOfRams	16
9.2. RamSize	16
9.3. ErrorOccurred	16
9.4. RamBandwidth	17
9.5. EnableRam0	17
9.6. ErrorCountRam0	18
9.7. ImageCountRam0	18
9.8. InjectErrorsRam0	19
10. Gpio	20
10.1. Gpi	20
10.2. FrontGpi	20
10.3. Gpo	20
10.4. FrontGpo	21
11. User LED	22
11.1. LedMode	22
11.2. LedPattern	22
12. Miscellaneous	23
Glossary	24
Index	27

Chapter 1. Introduction

This document provides detailed information on the Silicon Software Test Applet "FrameGrabberTest" for imaWorx CXP-12 Quad frame grabbers.


This applet is a frame grabber test applet. Its intention is to test the hardware. You shall not use this applet for your final image processing application. Use AcquisitionApplets or VA Applets instead!

The applet comprises the following functions:

- DMA Performance test: Different image dimensions for varying memory sizes and interrupt rates
- RAM Test: Check for errors and processing
- Camera: Check camera port image acquisition
- Camera Trigger: Send trigger signals to camera
- GPIO: Monitor the GPIs and set the GPOs
- Event test: Generate a software callback event
- Monitoring: FPGA Temperature, Power, PoCL, ... (See Chapter 12, 'Miscellaneous')

The following diagram shows the functional blocks of the applet.

Figure 1.1. Block Diagram of the applet

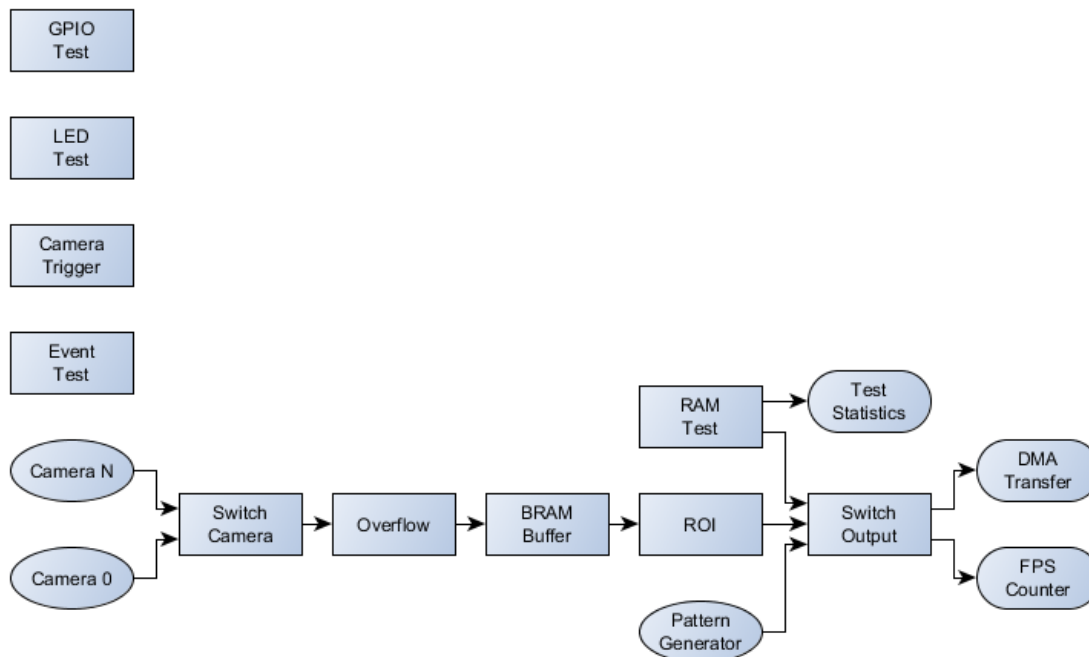

Chapter 2. Test Procedure in microDisplay


In the following, the steps to test the hardware with the applet FrameGrabberTest in microDisplay are explained. Of course, you can also integrate the tests in your own programs with the Silicon Software API and SDK.

Information: If you have connected your camera on frame grabber port B, C or D you have to press the button "Acquisition Start" in the GenICam explorer to start image acquisition with camera. In microDisplay you will see the information: "No camera detected", which you can ignore. For the connection of your camera to frame grabber port A no additional steps are necessary.

2.1. Load the Applet

First flash the applet "FrameGrabberTest.dll" to the frame grabber. Open the program 'microDiagnostics' and choose your frame grabber as displayed in Fig. 2.1. Click on 'Tools' and 'Flash Board(s)'. Select 'FrameGrabbertest.dll'. Having flashed the board follow the instructions in 'microDiagnostics' and close the program!

Figure 2.1. Flash the applet "FrameGrabberTest.dll in 'microDiagnostics'

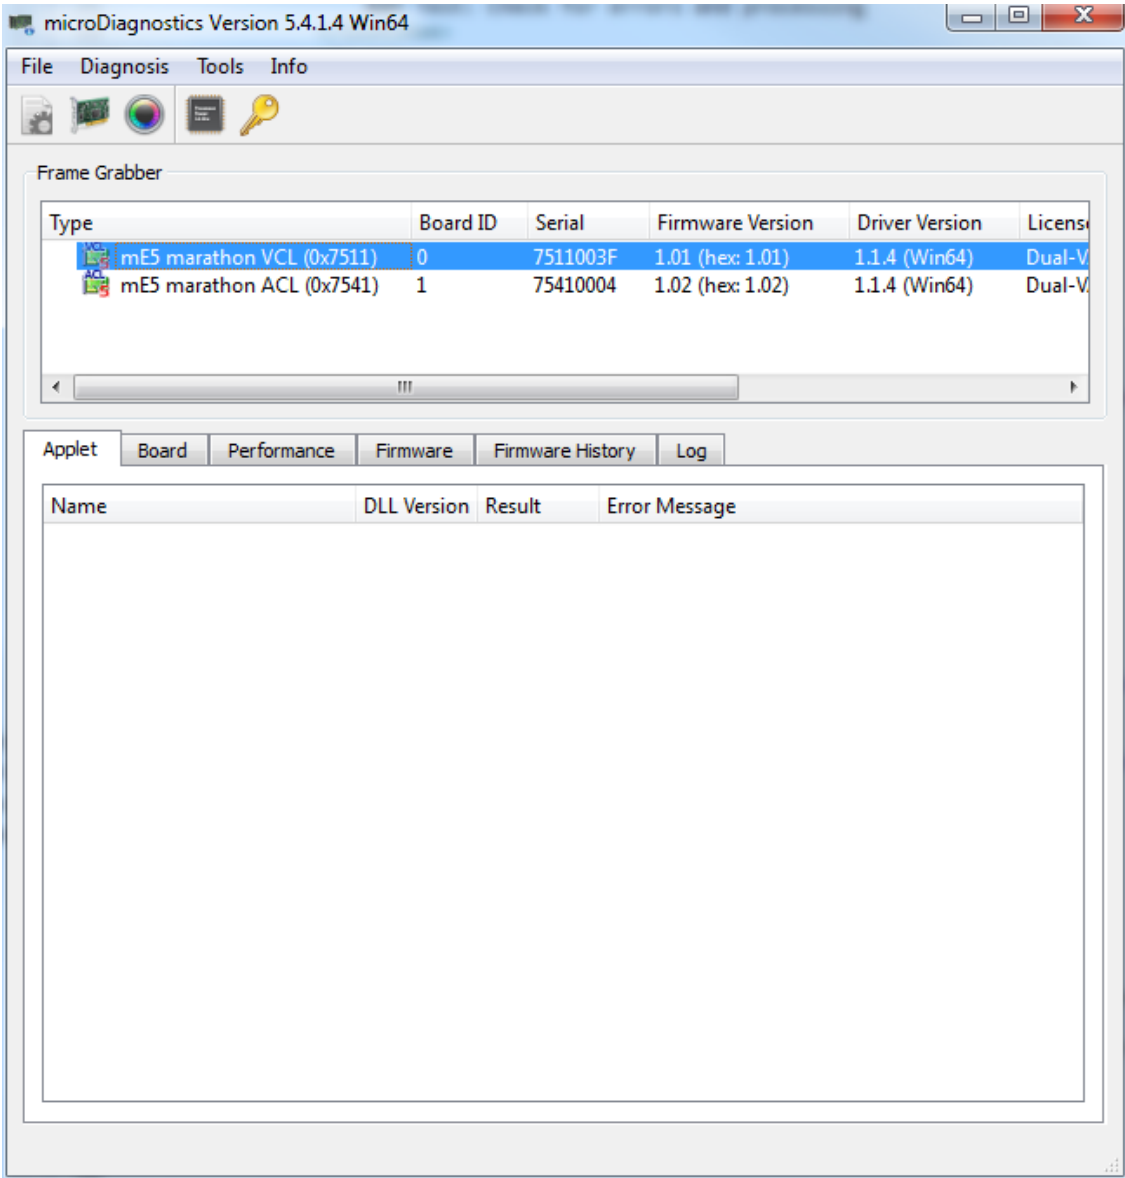

To load the applet "FrameGrabberTest.dll" open the program 'microDisplay' and click on the button 'LoadApplet' (see Fig. 2.2). Choose "FrameGrabberTest.dll", click on the button in the middle and then on 'close' (see Fig. 2.3).

Figure 2.2. Load the applet in 'microDisplay'


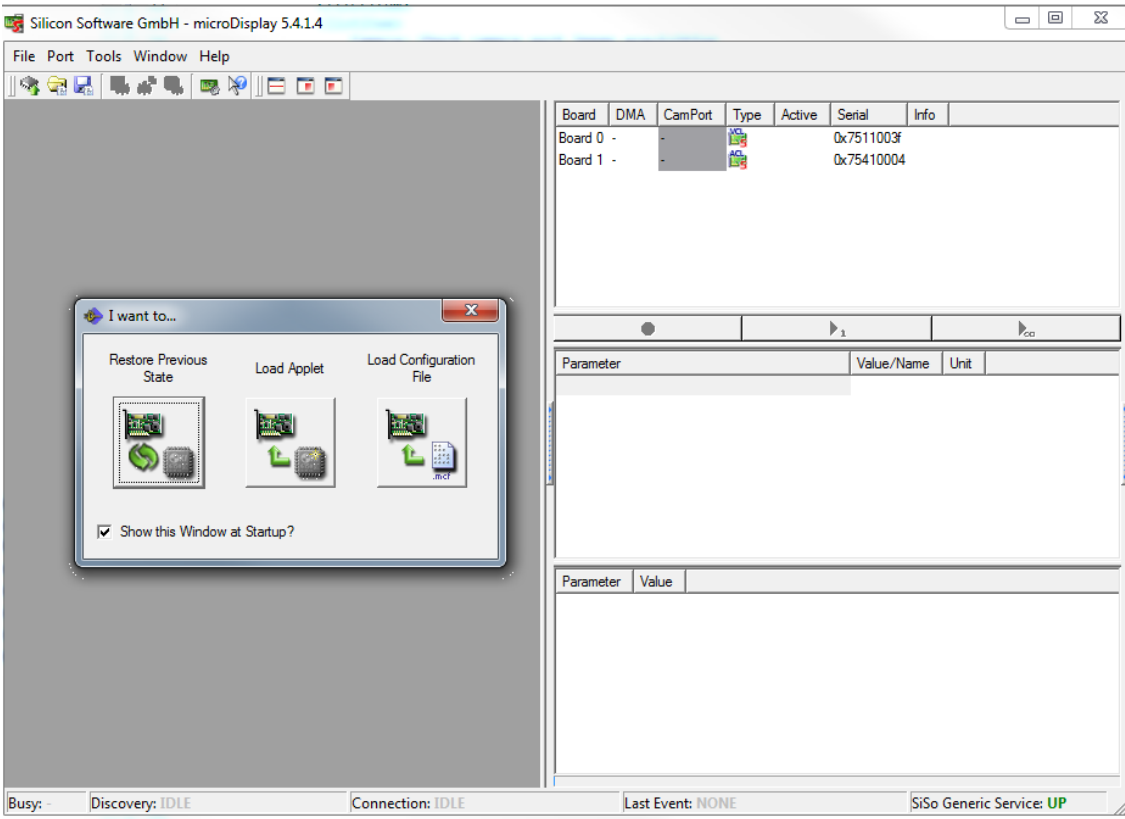



Figure 2.3. Load the applet "FrameGrabberTest.dll in 'microDisplay'

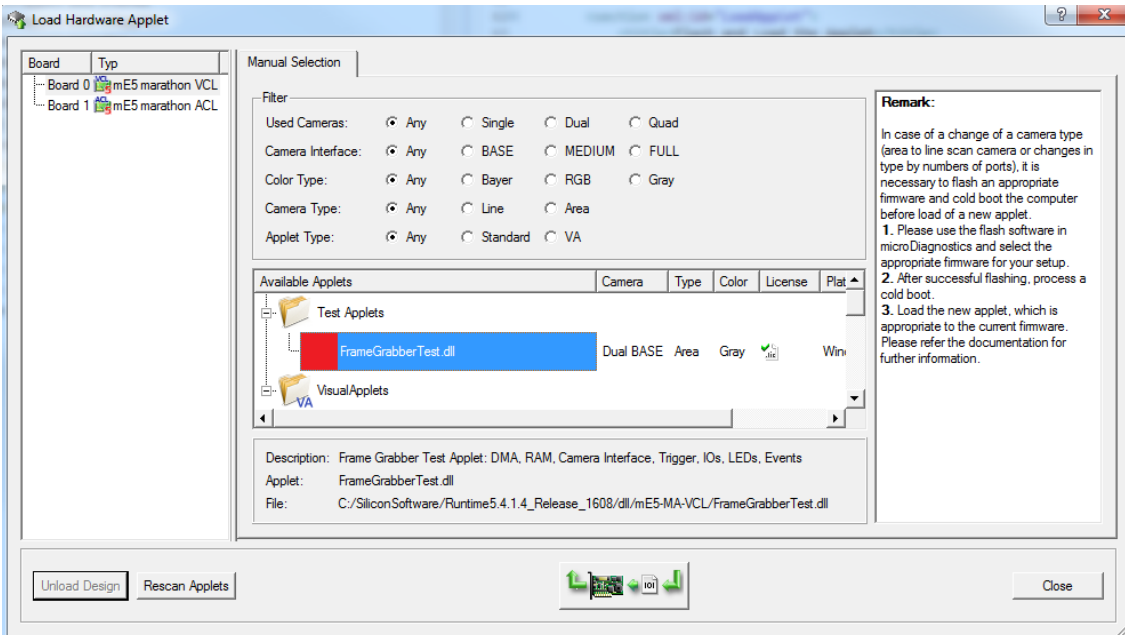

2.2. Choose Your Test Procedure

In the following we describe how you can choose the single test procedures, which are listed in the introduction text. In Fig. 2.4 you see a list of parameters ('TestMode' to 'Events'). To set the test procedures we use these parameters. In chapter 3 to 13 their functionality and settings are explained in detail.

Figure 2.4. Parameters of the applet 'FrameGrabbertest.dll' in 'microDisplay'

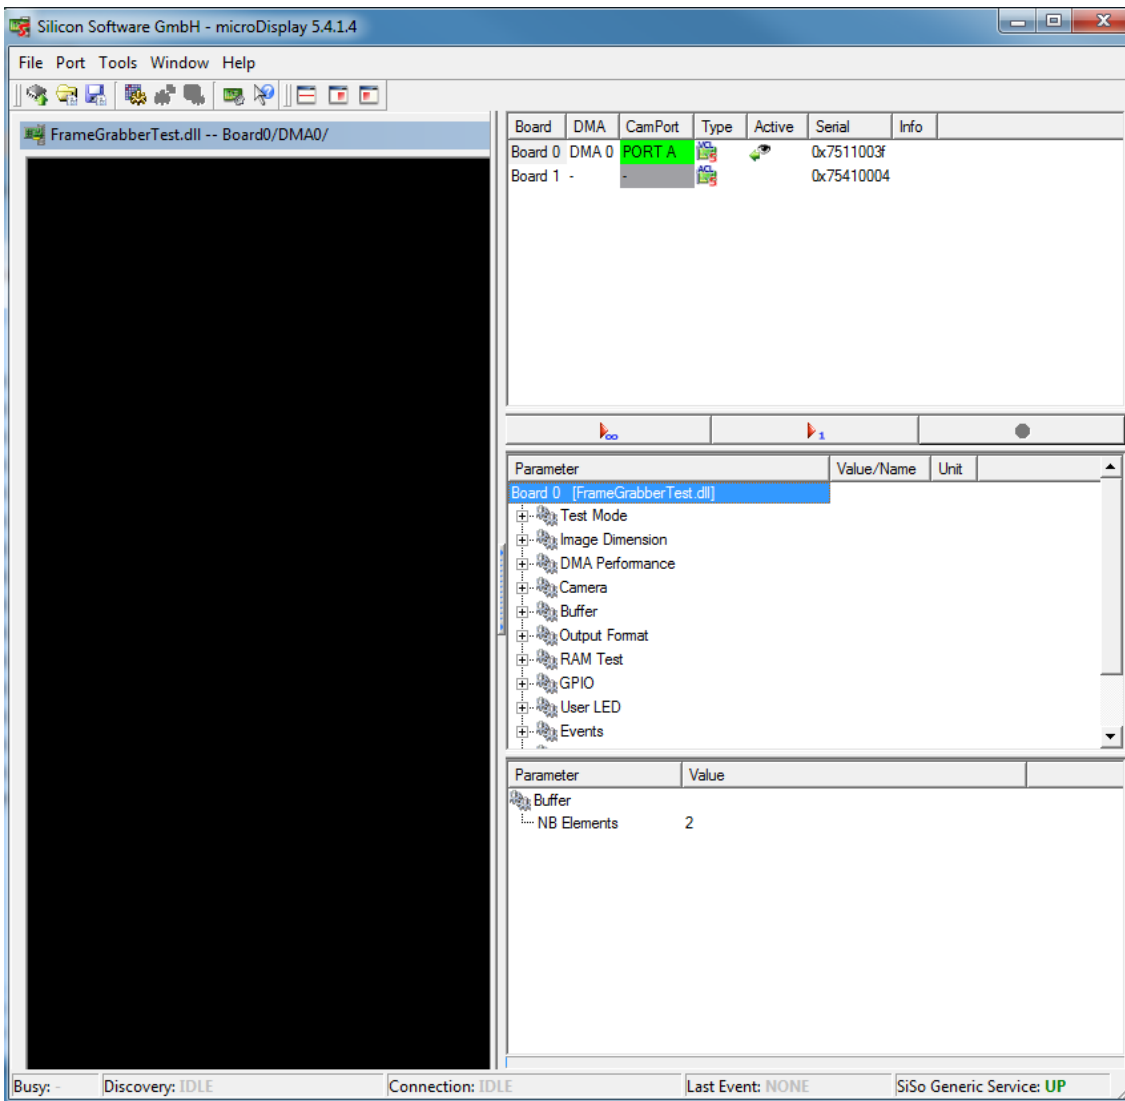

2.2.1. DMA Performance Test

To test the DMA performance set the parameter 'OutputSelect' under 'Test Mode' with Right-Mouse-Click to 'DMA Performance'. You can choose the image dimensions for the test with the parameters 'Width' and 'Height' (under 'ImageDimensions' (see Chapter 4)). With Right-Mouse-Click on 'DMA Performance Output Mode' under 'DMA Performance' (see Chapter 5) you can choose between maximum DMA performance ('DMA Performance Maximum') and user defined DMA framerate ('DMA Performance Custom Framerate'). For the latter set the frame rate with the parameter 'DMA Performance Framerate'. In addition you have the possibility to stop completely the DMA output in setting 'DMA Performance Output Mode' to 'DMA Performance Off'. You can monitor the current DMA framerate with the read only parameter 'FPS' under 'Output Format'.

2.2.2. RAM Test

To test the RAM performance of the RAM modules (0 to 1 or 3: depends on platform) set the parameter 'OutputSelect' under 'Test Mode' with Right-Mouse-Click to 'RAM Difference' or 'RAM Errors' for the corresponding RAM module. In 'RAM Difference' mode (difference between expected and read value from RAM) you can see RAM defects in output values, which are not zero. In 'RAM Errors' mode a white pixel indicates an error (see also chapter 3). Output image size is always 512 MiB. Suggested display width in 'RAM Difference' mode is to 4096 pixels (parameter 'Width' under 'ImageDimensions' (see Chapter 4)). You can choose display height with parameter 'Height' under 'ImageDimensions' (see Chapter 4)). If display size

exceeds output image size the output images are split to several displayed images. With the parameters 'Enable RAM0' to 'Enable RAM3' you have the possibility to stop the data processing for the corresponding RAM module (see also section 9.4). You can detect RAM errors, when RAM data processing is enabled, but the read-only parameter 'Image Count' of the corresponding RAM module does not increase. Defects of RAM modules can also be observed with the read-only parameters 'Error Occurred', 'Error COUNT_RAM0' to 'Error COUNT_RAM3'.

2.2.3. Camera Test/Camera Trigger Test

To test the camera port image acquisition set the parameter 'OutputSelect' under 'Test Mode' with Right-Mouse-Click to 'Camera'. You can choose the image ROI dimensions for the test with the parameters 'Width' and 'Height' (under 'ImageDimensions' (see Chapter 4)). Select your camera port with the parameter 'Camera Port' (under 'Camera') and choose your 'Camera Input Format'(see also Chapter 6). The read-only parameters 'Buffer fill level' and 'Buffer overflow' indicate the fill level and overflow of the BRAM between camera and DMA output (see also Chapter 7). It helps to identify problems during image acquisition. You have the possibility to send trigger signals to the camera on port 0 and port 1 setting the parameters 'FG_CCSEL0' to 'FG_CCSEL3' (under parameter 'Camera').

2.2.4. GPIO

You can monitor the digital inputs with the parameters 'GPI Status bitmask' and 'Front GPI Status bitmask' (under parameter 'GPIO'). Bit 0 to bit N represent digital inputs 0 to N. Find more information on these parameters in sections 10.1 and 10.2. You can set the digital outputs of the frame grabber with the parameters 'Output bitmask' and 'Front Output bitmask'. Values between 0 to 255 and 0 to 37 are possible. Here also bit 0 to bit N represent digital outputs 0 to N. You find further information on these parameters in sections 10.3 and 10.4.

2.2.5. Event Test

With the parameter 'Generate a Test Event' you can start a software callback event for test purposes. More information you find in Chapter 12.

2.2.6. Monitoring

You have the possibility to monitor several Applet and frame grabber parameters under 'Miscellaneous'. There you find e.g. information on the 'Applet version', 'Applet revision', 'Build time' and several more. Also current FPGA temperature, voltage and link speed information are located there.

Chapter 3. Test Mode

3.1. OutputSelect

The frame grabber test applet offerst several DMA output modes

- DMA Performance Output
- Camera Image Output
- RAM Test Output

The DMA performance output uses a pattern generator which is directly connected to the DMA and can support the full bandwidth. Use parameters *Width* and parameter *Height* set the generator and DMA output size. In this mode data will always be output at the maximum possible datarate which is capable by the PCIe interface and PC.

If you select camera output, the camera images are forwarded to the output. Again use parameters *Width* and *Height* to set the output size.

If you select the RAM test you need to note the following

- RAM Difference output:

Will output the absolute difference between the expected and read value from RAM. This should always be 0. Otherwise there is a RAM defect.

- RAM Error output:

Will output a white pixel for any error.

In this mode, the RAM data width is used so that the output is not 8 bit pixel. Instead for each RAM data one pixel is output. For example if your RAM has a data width of 128 bit, 16 8 bit pixel are merged together.

- The output image size will always be the size of the RAM. For example 512MiB or 256MiB.

Parameter *Width* will set a display width. The width is constant depending on difference or error output. In difference output the width should always be 4096.

Parameter *Height* will set a display height. If the actual image height exceeds the height of the RAM, the image is split into many several images.

Table 3.1. Parameter properties of OutputSelect

Property	Value																				
Name	OutputSelect																				
Display Name	Output Select																				
Interface	IEnumeration																				
Access policy	Read/Write/Change																				
Visibility	Beginner																				
Allowed values	<table border="0"> <tr> <td>DmaPerformance</td> <td>DMA Performance</td> </tr> <tr> <td>Camera</td> <td>Camera</td> </tr> <tr> <td>Ram0Difference</td> <td>RAM 0 Difference</td> </tr> <tr> <td>Ram0Errors</td> <td>RAM 0 Errors</td> </tr> <tr> <td>Ram1Difference</td> <td>RAM 1 Difference</td> </tr> <tr> <td>Ram1Errors</td> <td>RAM 1 Errors</td> </tr> <tr> <td>Ram2Difference</td> <td>RAM 2 Difference</td> </tr> <tr> <td>Ram2Errors</td> <td>RAM 2 Errors</td> </tr> <tr> <td>Ram3Difference</td> <td>RAM 3 Difference</td> </tr> <tr> <td>Ram3Errors</td> <td>RAM 3 Errors</td> </tr> </table>	DmaPerformance	DMA Performance	Camera	Camera	Ram0Difference	RAM 0 Difference	Ram0Errors	RAM 0 Errors	Ram1Difference	RAM 1 Difference	Ram1Errors	RAM 1 Errors	Ram2Difference	RAM 2 Difference	Ram2Errors	RAM 2 Errors	Ram3Difference	RAM 3 Difference	Ram3Errors	RAM 3 Errors
DmaPerformance	DMA Performance																				
Camera	Camera																				
Ram0Difference	RAM 0 Difference																				
Ram0Errors	RAM 0 Errors																				
Ram1Difference	RAM 1 Difference																				
Ram1Errors	RAM 1 Errors																				
Ram2Difference	RAM 2 Difference																				
Ram2Errors	RAM 2 Errors																				
Ram3Difference	RAM 3 Difference																				
Ram3Errors	RAM 3 Errors																				
Default value	DmaPerformance																				

Example 3.1. Usage of OutputSelect

```

/* Set */ OutputSelect = DmaPerformance;
/* Get */ value_ = OutputSelect;

```

Chapter 4. Image Dimension

4.1. Width

Set the output width using this parameter. The width setting defines the size for DMA test and camera ROI.

The DMA output is defined using parameter *OutputSelect*.

Note that for RAM test output the width and height settings simply define the display size.

Table 4.1. Parameter properties of Width

Property	Value
Name	Width
Display Name	Width
Interface	IInteger
Access policy	Read/Write
Visibility	Beginner
Allowed values	Minimum 32 Maximum 16384 Stepsize 32
Default value	1024
Unit of measure	pixel

Example 4.1. Usage of Width

```
/* Set */ Width = 1024;  
/* Get */ value_ = Width;
```

4.2. Height

Set the output height using this parameter. The height setting defines the size for DMA test and camera ROI.

The DMA output is defined using parameter *OutputSelect*.

Note that for RAM test output the width and height settings simply define the display size.

Table 4.2. Parameter properties of Height

Property	Value
Name	Height
Display Name	Height
Interface	IInteger
Access policy	Read/Write
Visibility	Beginner
Allowed values	Minimum 1 Maximum 65536 Stepsize 1
Default value	1024
Unit of measure	pixel

Example 4.2. Usage of Height

```
/* Set */ Height = 1024;  
/* Get */ value_ = Height;
```

Chapter 5. DMA Performance

5.1. DmaPerformanceOutputMode

The DMA Performance test can be used in several modes.

- Off: No data will be output
- Maximum: The image generator will run at maximum speed and data is output as fast as the DMA transfer allows. To obtain the maximum possible bandwidth of the DMA use this mode.
- Custom Framerate: Allows you to specify any framerate in the allowed range. Use parameter *DmaPerformanceFramerate* to define the framerate.

Table 5.1. Parameter properties of DmaPerformanceOutputMode

Property	Value
Name	DmaPerformanceOutputMode
Display Name	DMA Performance Output Mode
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	DmaPerformanceOff DMA Performance Off DmaPerformanceMaximum DMA Performance Maximum DmaPerformanceCustomFramerate DMA Performance Custom Framerate
Default value	DmaPerformanceMaximum

Example 5.1. Usage of DmaPerformanceOutputMode

```
/* Set */ DmaPerformanceOutputMode = DmaPerformanceMaximum;  
/* Get */ value_ = DmaPerformanceOutputMode;
```

5.2. DmaPerformanceFramerate

For the DMA test you can specify a custom framerate. Set parameter *DmaPerformanceOutputMode* to **FG_DMA_PERFORMANCE_CUSTOM_FRAMERATE** so that this parameter is enabled.

You can use any framerate. However, if the defined framerate exceeds the maximum possible by the DMA, the framerate is decreased.

Table 5.2. Parameter properties of DmaPerformanceFramerate

Property	Value
Name	DmaPerformanceFramerate
Display Name	DMA Performance Framerate
Interface	IFloat
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Minimum 0.931323 Maximum 1.25E8 Stepsize 8.0E-9
Default value	100.0
Unit of measure	fps

Example 5.2. Usage of DmaPerformanceFramerate

```
/* Set */ DmaPerformanceFramerate = 100.0;  
/* Get */ value_ = DmaPerformanceFramerate;
```

Chapter 6. Camera

6.1. CameraPort

Select the camera port index.

Table 6.1. Parameter properties of CameraPort

Property	Value
Name	CameraPort
Display Name	Camera Port
Interface	IInteger
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Minimum 0 Maximum 4 Stepsize 1
Default value	0

Example 6.1. Usage of CameraPort

```
/* Set */ CameraPort = 0;  
/* Get */ value_ = CameraPort;
```

6.2. TriggercameraOutSelect

Table 6.2. Parameter properties of TriggercameraOutSelect

Property	Value
Name	TriggercameraOutSelect
Display Name	CXP Trigger Select
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	On On Off Off
Default value	Off

Example 6.2. Usage of TriggercameraOutSelect

```
/* Set */ TriggercameraOutSelect = Off;  
/* Get */ value_ = TriggercameraOutSelect;
```

Chapter 7. Buffer

7.1. Filllevel

Indicates the buffer filllevel of the BRAM based buffer between the camera interface and DMA. Use this value if you output camera images to the DMA.

Table 7.1. Parameter properties of Filllevel

Property	Value
Name	Filllevel
Display Name	Buffer fill level
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 100 Stepsize 1
Unit of measure	%

Example 7.1. Usage of Filllevel

```
/* Get */ value_ = Filllevel;
```

7.2. Overflow

Indicates a buffer overflow. The parameter is automatically reset when read. Note that microDisplay continuously reads all parameters so that you might not see the occurrence of an overflow. Have a look at the event counter in this case.

The overflow shows buffer overflows of the BRAM based buffer between the camera interface and DMA.

Table 7.2. Parameter properties of Overflow

Property	Value
Name	Overflow
Display Name	Buffer overflow
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 1 Stepsize 1

Example 7.2. Usage of Overflow

```
/* Get */ value_ = Overflow;
```

Chapter 8. Output Format

8.1. Format

Table 8.1. Parameter properties of Format

Property	Value
Name	Format
Display Name	Output Format
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Mono8 Mono 8
Default value	Mono8

Example 8.1. Usage of Format

```
/* Set */ Format = Mono8;  
/* Get */ value_ = Format;
```

8.2. Fps

This read only parameter shows the current DMA framerate. It measures the number of frames which are output in one second. Only integer values i.e. completed frames are considered.

Table 8.2. Parameter properties of Fps

Property	Value
Name	Fps
Display Name	Fps
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 125000000 Stepsize 1

Example 8.2. Usage of Fps

```
/* Get */ value_ = Fps;
```

Chapter 9. RAM Test

9.1. NumberOfRams

Number of logic RAM modules the applet is using. The frame grabber might allow more but the applet might not use all of them.

Table 9.1. Parameter properties of NumberOfRams

Property	Value
Name	NumberOfRams
Display Name	Number of RAMs
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 1 Maximum 4 Stepsize 1
Unit of measure	

Example 9.1. Usage of NumberOfRams

```
/* Get */ value_ = NumberOfRams;
```

9.2. RamSize

Size of one RAM module. Unit is Mebibyte i.e. Byte times 2^{20} .

Table 9.2. Parameter properties of RamSize

Property	Value
Name	RamSize
Display Name	RAM Size
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 1 Maximum 8192 Stepsize 1
Unit of measure	MiB

Example 9.2. Usage of RamSize

```
/* Get */ value_ = RamSize;
```

9.3. ErrorOccurred

Is set if an error in any of the RAM modules is detected. This value should always be at FG_NO.

Table 9.3. Parameter properties of ErrorOccurred

Property	Value
Name	Error0ccurred
Display Name	Erorr Occured
Interface	IEnumeration
Access policy	Read-Only
Visibility	Beginner
Allowed values	Yes Yes No No

Example 9.3. Usage of ErrorOccurred

```
/* Get */ value_ = Error0ccurred;
```

9.4. RamBandwidth

Shows the throughput of the DRAM in MB/s. (10^6 byte). Ensure to not block the DRAM speed by the DMA. You can ensure this by setting the test output (parameter *OutputSelect*) mode to DMA performance or camera output.

Table 9.4. Parameter properties of RamBandwidth

Property	Value
Name	RamBandwidth
Display Name	RAM Bandwidth MBs
Interface	IFloat
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0.0 Maximum 40000.0 Stepsize 1.0

Example 9.4. Usage of RamBandwidth

```
/* Get */ value_ = RamBandwidth;
```

9.5. EnableRam0

You can stop the processing of data for each RAM module.

For frame grabbers with non shared memory this has no effect. However, for frame grabbers with shared memory, RAM modules can get more bandwidth if others are disabled.

Check the RAM image counter parameters *ImageCountRam0* to see if a RAM module processes data or not. If processing is enabled, but the counter value does not change, the RAM module might have a defect.

Table 9.5. Parameter properties of EnableRam0

Property	Value
Name	EnableRam0
Display Name	Enable RAM 0
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Yes Yes No No
Default value	Yes

Example 9.5. Usage of EnableRam0

```
/* Set */ EnableRam0 = Yes;
/* Get */ value_ = EnableRam0;
```

9.6. ErrorCountRam0

This parameter shows the number of errors detected for the respective RAM module. One error indicates that in a RAM data cell at least one bit is not equal to the expected value. The RAM data cell size corresponds to the RAM data width and can be for example 128Bit or 256Bit.

Table 9.6. Parameter properties of ErrorCountRam0

Property	Value
Name	ErrorCountRam0
Display Name	Error Count RAM 0
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 4294967295 Stepsize 1
Unit of measure	pixel errors

Example 9.6. Usage of ErrorCountRam0

```
/* Get */ value_ = ErrorCountRam0;
```

9.7. ImageCountRam0

This value is incremented when the RAM module has been fully written and read. If this value does not increase it might show a defect in a RAM module.

Table 9.7. Parameter properties of ImageCountRam0

Property	Value
Name	ImageCountRam0
Display Name	Image Count RAM 0
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 4294967295 Stepsize 1

Example 9.7. Usage of ImageCountRam0

```
/* Get */ value_ = ImageCountRam0;
```

9.8. InjectErrorsRam0

For self-test you can inject errors to the current processing.

Table 9.8. Parameter properties of InjectErrorsRam0

Property	Value
Name	InjectErrorsRam0
Display Name	Inject Errors on RAM0
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Yes Yes No No
Default value	No

Example 9.8. Usage of InjectErrorsRam0

```
/* Set */ InjectErrorsRam0 = No;
/* Get */ value_ = InjectErrorsRam0;
```

Chapter 10. Gpio

10.1. Gpi

Parameter *Gpi* is used to monitor the digital inputs of the frame grabber.

You can read the current state of these inputs using parameter *Gpi*. Bit 0 of the read value represents input 0, bit 1 represents input 1 and so on. For example, if you obtain the value 37 or hexadecimal 0x25 the frame grabber will have high level on it's digital inputs 0, 2 and 5.

Table 10.1. Parameter properties of Gpi

Property	Value
Name	Gpi
Display Name	GPI Status bitmask
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 255 Stepsize 1

Example 10.1. Usage of Gpi

```
/* Get */ value_ = Gpi;
```

10.2. FrontGpi

Parameter *FrontGpi* is used to monitor the digital inputs of the frame grabber.

You can read the current state of these inputs using parameter *FrontGpi*. Bit 0 of the read value represents input 0, bit 1 represents input 1 and so on. For example, if you obtain the value 10 or hexadecimal 0xA the frame grabber will have high level on it's digital inputs 1 and 3.

Table 10.2. Parameter properties of FrontGpi

Property	Value
Name	FrontGpi
Display Name	Front GPI Status bitmask
Interface	IInteger
Access policy	Read-Only
Visibility	Beginner
Allowed values	Minimum 0 Maximum 3 Stepsize 1

Example 10.2. Usage of FrontGpi

```
/* Get */ value_ = FrontGpi;
```

10.3. Gpo

You can use this parameter to set the state of the digital outputs.

Bit 0 of the read value represents output 0, bit 1 represents output 1 and so on. For example, if you set the value to 37 or hexadecimal 0x25 the frame grabber will have high level on it's digital outputs 0, 2 and 5.

Table 10.3. Parameter properties of Gpo

Property	Value
Name	Gpo
Display Name	Output bitmask
Interface	IInteger
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Minimum 0 Maximum 255 Stepsize 1
Default value	255

Example 10.3. Usage of Gpo

```
/* Set */ Gpo = 255;
/* Get */ value_ = Gpo;
```

10.4. FrontGpo

You can use this parameter to set the state of the front digital outputs.

Bit 0 of the read value represents output 0, bit 1 represents output 1 and so on. For example, if you set the value to 37 or hexadecimal 0x25 the frame grabber will have high level on it's digital outputs 0, 2 and 5.

Table 10.4. Parameter properties of FrontGpo

Property	Value
Name	FrontGpo
Display Name	Front Output bitmask
Interface	IInteger
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Minimum 0 Maximum 15 Stepsize 1
Default value	15

Example 10.4. Usage of FrontGpo

```
/* Set */ FrontGpo = 15;
/* Get */ value_ = FrontGpo;
```

Chapter 11. User LED

11.1. LedMode

The applet has several user LEDs. You can either define the state of this LEDs manual using parameter *LedPattern* or use an automatic pattern. Use this parameter to set the desired mode.

Table 11.1. Parameter properties of LedMode

Property	Value
Name	LedMode
Display Name	LED Mode
Interface	IEnumeration
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Manual Manual Counter Counter
Default value	Manual

Example 11.1. Usage of LedMode

```
/* Set */ LedMode = Manual;  
/* Get */ value_ = LedMode;
```

11.2. LedPattern

The applet has several user LEDs. Set the state of the user LEDs using this parameter. Use a bitmask. For example, if you set the parameter to value 5, LEDs 0 and 2 will be switched on. Note that the number of user LEDs depends on the frame grabber used.

Table 11.2. Parameter properties of LedPattern

Property	Value
Name	LedPattern
Display Name	LED pattern bitmask
Interface	IInteger
Access policy	Read/Write/Change
Visibility	Beginner
Allowed values	Minimum 0 Maximum 255 Stepsize 1
Default value	0

Example 11.2. Usage of LedPattern

```
/* Set */ LedPattern = 0;  
/* Get */ value_ = LedPattern;
```

Chapter 12. Miscellaneous

The miscellaneous module category summarizes other read and write parameters such as the camera status, buffer fill levels, DMA transfer lengths, time stamps and buffer fill-levels.

Glossary

Area of Interest (AOI)	See Region of Interest.
Board	A Basler hardware. Usually, a board is represented by a frame grabber. Boards might comprise multiple devices.
Board ID Number	An identification number of a Basler board in a PC system. The number is not fixed to a specific hardware but has to be unique in a PC system.
Camera Index	The index of a camera connected to a frame grabber. The first camera will have index zero. Mind the difference between the camera index and the frame grabber camera port. See also Camera Port.
Camera Port	The Basler frame grabber connectors for cameras are called camera ports. They are numbered {0, 1, 2, ...} or enumerated {A, B, C, ...}. Depending on the interface one camera could be connected to multiple camera ports. Also, multiple cameras could be connected to one camera port.
Camera Tap	See Tap.
Device	A board can consist of multiple devices. Devices are numbered. The first device usually has number one.
Direct Memory Access (DMA)	<p>A DMA transfer allows hardware subsystems within the computer to access the system memory independently of the central processing unit (CPU).</p> <p>Basler uses DMAs for data transfer such as image data between a board e.g. a frame grabber and a PC. Data transfers can be established in multiple directions i.e. from a frame grabber to the PC (download) and from the PC to a frame grabber (upload). Multiple DMA channels may exist for one board. Control and configuration data usually do not use DMA channels.</p>
DMA Channel	See DMA Index.
DMA Index	The index of a DMA transfer channel. See also Direct Memory Access.
Event	<p>In programming or runtime environments, a callback function is a piece of executable code that is passed as an argument, which is expected to call back (execute) exactly that time an event is triggered. These events are not related to a special camera functionality and based on frame grabber internal functionality.</p> <p>Basler uses hardware interrupts for the event transfer and processing is absolutely optimized for low latency. These interrupts are only produced by the frame grabber if an event is registered and activated by software. If an event is fired at a very high frequency this may influence the system performance.</p> <p>For example these events can be used to check the reliability between a frame trigger input and the resulting and expected camera frame.</p> <p>The Basler Framegrabber SDK enables an application to get these event notifications about certain state changes at the data flow from camera to RAM and the image and trigger processing as well. Please consult the Basler Framegrabber SDK documentation for more details concerning the implementation of this functionality. Some events are enabled to produce additional data, which is described for the event itself.</p>

Frame Grabber	Usually a PC hardware using PCI express to interface the camera and grab camera images. The frame grabber will grab, buffer, pre-process and forward the images to the PC memory. Moreover, the frame grabber performs the trigger signal processing to trigger the camera, external lights and controllers. On V-series frame grabber custom processing can be implemented using VisualApplets. See also Direct Memory Access, Interface Card, VisualApplets.
GenICam	Generic Interface for Cameras is a generic programming interface for machine vision (industrial) cameras.
GenTL	GenICam Transport Layer. This is the transport layer interface for enumerating cameras, grabbing images from the camera, and moving them to the user application.
Interface Card	Usually a PC hardware using PCI express to interface the camera and grab camera images. The interface card will grab, buffer and forward the images to the PC memory. Moreover, the interface card performs the trigger signal processing to trigger the camera, external lights and controllers. See also Direct Memory Access, Frame Grabber.
Port	See Camera Port.
Process	An image or signal data processing block. A process can include one or more cameras, one or more DMA channels and modules.
Region of Interest (ROI)	Represents a part of a frame. Mostly rectangular and within the original image boundaries. Defined by source coordinates and its dimension. The frame grabber cuts the region of interest from the camera image. A region of interest might reduce or increase the required bandwidth and the corresponding image dimension.
Sensor Tap	See Tap.
Software Callback	See Event.
Tap	Some cameras have multiple taps. This means, they can acquire or transfer more than one pixel at a time which increases the camera's acquisition speed. The camera sensor tap readout order varies. Some cameras read the pixels interlaced using multiple taps, while some cameras read the pixel simultaneously from different locations on the sensor. The reconstruction of the frame is called sensor readout correction. The Camera Link interface is also using multiple taps for image transfer to increase the bandwidth. These taps are independent from the sensor taps.
Trigger	In machine vision and image processing, a trigger is an event which causes an action. This can be for example the initiation of a new line or frame acquisition, the control of external hardware such as flash lights or actions by a software applications. Trigger events can be initiated by external sources, an internal frequency generator (timer) or software applications. The event itself is mostly based on a rising or falling edge of a electrical signal.
Trigger Input	A logic input of a trigger IO. The first input has index 0. Check mapping of input pins to logic inputs in the hardware documentation.
Trigger Output	A logic output of a trigger IO. The first output has index 1. Please check the mapping of output pins to logic outputs in the hardware documentation. The electrical characteristics and specification can be found related to the selected or used trigger board/connector.
Trigger Reliability	See Event.

User Interrupt

See Event.

VisualApplets

Simple programming of FPGA-based image processing devices.

VisualApplets enables access to the FPGA processors in the image processing hardware, such as frame grabbers, industrial cameras and image processing devices, to implement individual image processing applications.

Index

B

Buffer, 14

C

Camera, 13

CameraPort, 13

D

DMA Performance, 11

DmaPerformanceFramerate, 11

DmaPerformanceOutputMode, 11

E

EnableRam0, 17

ErrorCountRam0, 18

ErrorOccurred, 16

F

Filllevel, 14

Format, 15

Fps, 15

Front GPO, 21

FrontGpi, 20

FrontGpo, 21

G

Gpi, 20

GPI, 20, 20

GPIO, 20

Gpo, 20

GPO, 21

H

Height, 9

I

Image Dimension, 9

ImageCountRam0, 18

InjectErrorsRam0, 19

L

LedMode, 22

LedPattern, 22

M

Miscellaneous, 23

N

NumberOfRams, 16

O

Output Format, 15

OutputSelect, 7
Overflow, 14

R

RAM Test, 16
RamBandwidth, 17
RamSize, 16

T

Test Mode, 7
Trigger
 Digital Input, 20, 20
 Digital Output, 21, 21
 Front GPO, 21
 GPI, 20, 20
 GPO, 21
 Input, 20, 20
 Output, 21, 21
TriggercameraOutSelect, 13

U

User LED, 22

W

Width, 9